

SOT-23 Plastic-Encapsulate Transistors

MMBT3904LT1 TRANSISTOR (NPN)

FEATURES

Power dissipation

P_{CM} : 0.2 W ($T_{amb}=25^{\circ}C$)

Collector current


I_{CM} : 0.2 A

Collector-base voltage

$V_{(BR)CBO}$: 60 V

Operating and storage junction temperature range

T_J, T_{stg} : $-55^{\circ}C$ to $+150^{\circ}C$

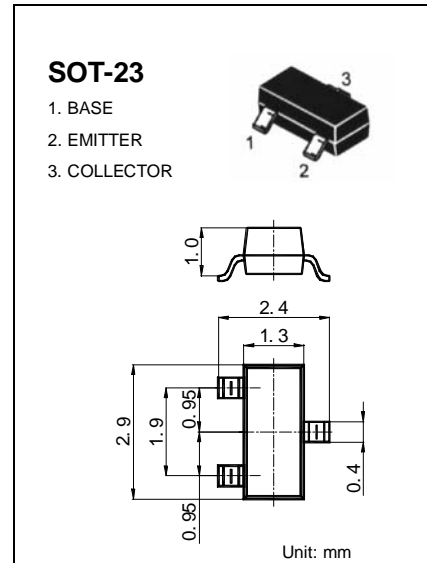

ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100 \mu A, I_E = 0$	60		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1 mA, I_B = 0$	40		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 100 \mu A, I_C = 0$	6		V
Collector cut-off current	I_{CBO}	$V_{CB} = 60V, I_E = 0$		0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE} = 40V, I_B = 0$		0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5V, I_C = 0$		0.1	μA
DC current gain	$H_{FE(1)}$	$V_{CE} = 10V, I_C = 1mA$	100	300	
	$H_{FE(2)}$	$V_{CE} = 1V, I_C = 50mA$	60		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 50mA, I_B = 5mA$		0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 50mA, I_B = 5mA$		0.95	V
Transition frequency	f_T	$V_{CE} = 20V, I_C = 10mA$ $f = 100MHz$	250		MHz
Delay Time	t_d	$V_{CC} = 3.0Vdc, V_{BE} = -0.5Vdc$		35	nS
Rise Time	t_r	$I_C = 10mA, I_{B1} = 1.0mA$		35	nS
Storage Time	t_s	$V_{CC} = 3.0Vdc, I_C = 10mA$		200	nS
Fall Time	t_f	$I_{B1} = I_{B2} = 1.0mA$		50	nS

DEVICE MARKING

MMBT3904LT1=1AM