


SN SERIES MINI EUROPEAN STYLE CRIMPING PLIER

SN-28B

Amazon's Choice

Range of Application
For Non-Insulated tabs and receptacles




Specification

Crimping Range: 0.1-1.0mm², AWG: 28-18, For 2.54mm 3.96mm KF2510 connector
Wire-electrode cutting die sets promise a high-precision crimping result.
Work with Molex part 43030-0006 terminal connector
Good for ATX, EPS, PCIE and SATA power pins
Length :190mm; Weight :0.4kg

SN-48B

Range of Application
For Non-Insulated tabs and receptacles




Specification

Crimping Range: 0.14-1.5mm²; AWG: 26-16
Material: High-carbon steel
Used for Dupont & JST-SM Molex Connectors and Pins
For 3.96/4.8/5.08/6.3 mm grounding terminal connectors
length :190mm ;Weight :0.4kg

SN-01BM

Range of Application
For Non-Insulated tabs and receptacles




Specification

Crimping Range: 0.08-0.5mm²; AWG:28-20
Suitable for small connectors
Suitable for PH2.0, XH2.54, KF2510, AWG 28-20, JST, Molex, Servo Connector Plug
Length: 190mm;Weight: 0.4kg

SN-2549

Range of Application
For Non-Insulated tabs and receptacles



Specification

Crimping Range:0.08-0.5/0.25/0.5/1.0mm²; AWG:28-18AWG
Compatible with PH2.0/XH2.54/Dupont2.54/2.8/3.0/3.96/4.8/KF2510/JST Terminal
SN-2549=SN-28B+SN-01BM
Length:190mm;Weight:0.4kg

SN-02C

Range of Application
For Non-Insulated tabs and receptacles




Specification

Green: 0.25-0.5mm² 24-20AWG Red: 0.75-1.5mm² 18-14AWG Blue: 2.0-2.5mm² 10AWG
Length: 191mm; Weight: 0.40kg

SN-11011

Range of Application
For Non-Insulated tabs and receptacles



Specification

Crimping Range: 0.5-2.5mm²; 20-14AWG
Length:190mm; Weight:0.4kg





SN SERIES RATCHET CRIMPING PLIER

- The components of the ratchet crimping tools are made of special steel.
- Designed according to human factors engineering, it can save 50% energy when crimping.
- Precise crimping die sets and integral lock with self releasing mechanism ensure high-quality crimping effect after crimping repeatedly.
- Accurate adjustment before ex works delivery.
- Due to best handle grasping position, light and compact structure and handle design ensure perfect crimping effect.



Model	Range of Application	Capacity	AWG	Length	Weight
-------	----------------------	----------	-----	--------	--------

SN Series Ratchet Crimping Plier

	SN-0725	For Insulated Terminals	0.5-2.5 mm ²	20-14 AWG	190 mm	0.40Kg
	SN-0325	For Non-Insulated Terminals	0.5-2.5 mm ²	20-14 AWG	190 mm	0.40Kg
	SN-02WF2C	For cable end-sleeves and Insulated Terminals	0.5-2.5 mm ²	20-14 AWG	190 mm	0.40Kg
	SN-02WF SNA-02WF	For Non-Insulated tabs and receptacles	0.14-2.5 mm ²	26-14 AWG	190 mm	0.40Kg
	SN-05WF	For Insulated and Non-Insulated cable end-sleeves	0.5-6.0 mm ²	20-10 AWG	190 mm	0.40Kg
	SN-06WF	For Insulated and Non-Insulated cable end-sleeves	0.25-6.0 mm ²	24-10 AWG	190 mm	0.40Kg
	SN-16WF	For Insulated and Non-Insulated cable end-sleeves	6-16 mm ²	10-6 AWG	190 mm	0.40Kg
	SN-06WFL	For Insulated and Non-Insulated cable end-sleeves	0.25-6 mm ²	24-10 AWG	190 mm	0.40Kg

HS SERIES RATCHET CRIMPING PLIER

- The components of the ratchet crimping tools are made of special steel.
- Designed according to human factors engineering, it can save 50% energy when crimping.
- Precise crimping die sets and integral lock with self releasing mechanism ensure high-quality crimping effect after crimping repeatedly.
- Accurate adjustment before ex works delivery.
- Due to best handle grasping position, light and compact structure and handle design ensure perfect crimping effect.



■ Two kinds of handles are available for selection.

Model	Range of Application	Capacity	AWG	Length	Weight
-------	----------------------	----------	-----	--------	--------

HS Series Ratchet Crimping Plier

	HS-30J HS-30JC	For cable end-sleeves and Insulated Terminals	0.5-6.0mm ² 1.0-6.0mm ²	22-10 AWG 20-10 AWG	230 mm	0.6Kg
	HS-1KH	For crimping the terminal of aviation plug-in	2.0/2.2/2.4 mm ²	14 AWG	230 mm	0.6Kg
	HS-07FL	For 1.25-2.5mm ² Flag Type female receptacles Insulated Terminals	1.25-2.5 mm ²	18-14 AWG	230 mm	0.6Kg
	HS-03B HS-03BC	For Non-Insulated tabs and receptacles	1.5-6.0 mm ² 0.5-6.0 mm ²	16-10 AWG 20-10 AWG	230 mm	0.6Kg
	HS-05FL HS-FL	For 4.8-6.3mm ² Flag Type receptacles	4.8-6.3 mm ²		230 mm	0.6Kg
	HS-11	For Clamp of galvanothermy film terminal	4.0-6.0 mm ²	12-10 AWG	230 mm	0.6Kg
	HS-12	For 6-8-10mm ² Terminals	6-8-10 mm ²	10-8 AWG	230 mm	0.6Kg
	HS-101	For Non-Insulated Terminals	1.5-10 mm ²	16-8 AWG	230 mm	0.6Kg



HS SERIES RATCHET CRIMPING PLIER

Model	Range of Application	Capacity	AWG	Length	Weight
HS Series Ratchet Crimping Plier					
HS-1016	For Non-Insulated Terminals	0.5-16 mm ²	20-8 AWG	230 mm	0.6Kg
HS-10	For Non-Insulated Terminals	1.5-6.0 mm ²	16-10 AWG	230 mm	0.6Kg
HS-06WF2C	For cable end-sleeves and Insulated Terminals	0.5-2.5 mm ²	20-14 AWG	230 mm	0.6Kg
HS-04WF	For Insulated and Non-Insulated cable end-sleeves	0.75-10 mm ²	18-8 AWG	230 mm	0.6Kg
HS-04WFL	For Insulated and Non-Insulated cable end-sleeves	0.5-4.0 mm ²	20-12 AWG	230 mm	0.6Kg
HS-26TW	For Insulated and Non-Insulated cable end-sleeves	2 × 0.5-6.0 mm ²	2 × 20-10 AWG	230 mm	0.6Kg
HS-625WFL	For Non-Insulated Terminals	6-25 mm ²	10-4 AWG	230 mm	0.6Kg
HS-35WF	For Insulated and Non-Insulated cable end-sleeves	10-35 mm ²	8-2 AWG	230 mm	0.6Kg
HS-02H	For coaxial cable RG59, RG62, BLEDEN8281,50 and 75 ohm	0.315"(8.0mm)/0.252" (6.4mm)/0.068"(1.7m m)HEX & 0.042"(1.0mm)SQ		230 mm	0.6Kg
HS-02H1	For coaxial cable RG59, RG6 VIDEO CABLE	0.346"(8.8mm) /0.319"(8.1mm)/ 0.256"(6.5mm) HEX		230 mm	0.6Kg
HS-05H	For coaxial cable Belden 1885A, 1865A,1505A, 1505F,1694A, 1694F,179DT	0.178"(4.5mm)/0.255" (6.5mm)/0.278"(7.0mm)/0.088" (1.7mm)/0.041" (1.0mm) HEX		230 mm	0.6Kg
HS-457	For coaxial cable RG6, RG58	0.320"(8.13mm) /0.210"(5.33mm)/ 0.185"(4.7mm) HEX		230 mm	0.6Kg

FSC SERIES RATCHET CRIMPING PLIER



- For crimping non-insulated terminals
- Crimping range: 22-8AWG (0.5-10mm²)
- Precise crimping die sets and integral lock with self releasing mechanism ensure high-quality crimping effect after crimping repeatedly.
- Scientific leverage design saves energy when operating, Release locking if operates error
- Energy saving by humanization handle design



FSC-2550GF 25-50mm² FSC-056YJ 0.5-6.0mm² FSC-1025TD 10-25mm² FSC-0068 used for coaxial cables FSC-1025TX/SCX 10-25mm²

Model	Range of Application	Capacity	AWG	Length	Weight
FSC Series Ratchet Crimping Plier					
FSC-0510GF	For Insulated and Non-Insulated twin cable end-sleeves	0.5-10 mm ²	22-8 AWG	223 mm	0.73 Kg
FSC-2056GF	For Insulated and Non-Insulated twin cable end-sleeves	2 × 0.5-6 mm ²	2 × 22-10 AWG	223 mm	0.73 Kg



FSC SERIES RATCHET CRIMPING PLIER

Model	Range of Application	Capacity	AWG	Length	Weight
FSC Series Ratchet Crimping Plier					
FSC-625GF	For Insulated and Non-Insulated cable end-sleeves	6,10,16,25 mm ²	10-4 AWG	223 mm	0.73 Kg
FSC-1035GF	For Insulated and Non-Insulated cable end-sleeves	10,16,25,35 mm ²	8-2 AWG	223 mm	0.73 Kg
FSC-2616GF	For Insulated and Non-Insulated twin cable end-sleeves	2 x 6,10,16 mm ²	2 x 10-6 AWG	223 mm	0.73 Kg
FSC-2550GF	For Insulated and Non-Insulated cable end-sleeves	25,35,50 mm ²	4-1 AWG	223 mm	0.73 Kg
FSC-1510TX	For Insulated Terminals Hexagonal type	1.5,2.5,4,6,10 mm ²	16-8 AWG	223 mm	0.73 Kg
FSC-416TX	For Insulated Terminals Hexagonal type	4,6,10,16 mm ²	12-6 AWG	223 mm	0.73 Kg
FSC-0510TD	For Non-Insulated Terminals Point type	0.5-1.5,1.5-2.5,2.5-4,4-6,6-10 mm ²	22-8 AWG	223 mm	0.73 Kg
FSC-056YJ	For Insulated Terminals	0.5-1.5,1.5-2.5,4-6 mm ²	22-10 AWG	223 mm	0.73 Kg
FSC-156B	For Non-Insulated tabs and receptacles	1.5,2.5,4-6 mm ²	20-10 AWG	223 mm	0.73 Kg



LY SERIES RATCHET CRIMPING PLIER

- The components of the ratchet crimping tools are made of special steel.
- Designed according to human factors engineering, it can save 50% energy when crimping.
- Precise crimping die sets and integral lock with self releasing mechanism ensure high-quality crimping effect after crimping repeatedly.
- Accurate adjustment before ex works delivery.
- Due to best handle grasping position, light and compact structure and handle design ensure perfect crimping effect.



Model	Range of Application	Capacity	AWG	Length	Weight
LY Series Ratchet Crimping Plier					
LY-30J/LY-30JC	For Insulated Terminals	0.5-6.0 mm ² 1.0-6.0 mm ²	20-10 AWG 18-10 AWG	220 mm	0.50 Kg
LY-03C	For Insulated Terminals	0.5-6.0 mm ²	20-10 AWG	220 mm	0.50 Kg
LY-07FL	For 0.5-2.5mm ² Flag Type Insulated female receptacles	1.25-2.5 mm ²	16-13 AWG	220 mm	0.49 Kg
LY-03B/LY-03BC	For Non-Insulated tabs and receptacles	1.5-6.0 mm ² 0.5-6.0 mm ²	16-10 AWG 22-10 AWG	220 mm 220 mm	0.50 Kg 0.50 Kg
LY-10	For Non-Insulated Terminals	1.5-6.0 mm ²	16-10 AWG	220 mm	0.50 Kg
LY-101	For Non-Insulated Terminals	1.5-10 mm ²	16-8 AWG	220 mm	0.50 Kg
LY-1016	For Non-Insulated Terminals	0.5-16 mm ²	22-8 AWG	220 mm	0.50 Kg




LY SERIES RATCHET CRIMPING PLIER

Model	Range of Application	Capacity	AWG	Length	Weight
LY Series Ratchet Crimping Plier					
LY-06WF2C	For cable end-sleeves and Insulated Terminals	0.5-2.5 mm ²	22-14 AWG	220 mm	0.50 Kg
LY-04WF	For Insulated and Non-Insulated cable end-sleeves	0.75-10 mm ²	18-8 AWG	220 mm	0.50 Kg
LY-04WFL	For Insulated and Non-Insulated cable end-sleeves	0.5-4.0 mm ²	22-12 AWG	220 mm	0.50 Kg
LY-26TW	For Insulated and Non-Insulated cable end-sleeves	2 x 0.5-6.0 mm ²	2 x 22-10 AWG	220 mm	0.50 Kg
LY-16GF	For Non-Insulated Terminals	4-16 mm ²	16-8 AWG	220 mm	0.50 Kg
LY-625WFL	For Non-Insulated Terminals Width:22mm	6-25 mm ²	10-4 AWG	220 mm	0.50 Kg
LY-35WF	For Insulated and Non-Insulated cable end-sleeves	10-35 mm ²	8-2 AWG	220 mm	0.50 Kg
LY-02H2	For coaxial cable RG59, RG62, BELDEN8281,50 and 75 ohm	0.315"(8.0mm)/ 0.252"(6.4mm)/ 0.068"(1.7mm) HEX&0.042"(1.0mm) SQ		220 mm	0.50 Kg
LY-02H	For coaxial cable RG59, RG62, BLEDEN8281,50 and 75 ohm	0.315"(8.0mm)/ 0.252"(6.4mm)/ 0.068"(1.7mm) HEX&0.042"(1.0mm) SQ		220 mm	0.50 Kg
LY-02H1	For coaxial cable RG59, RG6 VIDEO CABLE	0.346"(8.8mm)/ 0.319"(8.1mm)/ 0.256"(6.5mm) HEX		220 mm	0.50 Kg
LY-05H	For coaxial cable BELDEN 1885A, 1865A,1505A, 1505F,1694A, 1694F,179DT	0.178"(4.5mm)/ 0.255"(6.5mm)/ 0.278"(7.0mm) 8"(1.7mm)/ 0.041"(1.0mm)HEX		220 mm	0.50 Kg
LY-457	For coaxial cable RG6, RG58	0.320"(8.13mm)/ 0.210"(5.33mm)/ 0.185"(4.7mm) HEX		220 mm	0.50 Kg

AP SERIES RATCHET CRIMPING PLIER

- Applicable for non-welding and standard electric connection, New leverage design, saves at least 35% energy compared to common crimping tools.
- All the key parts of the energy saving crimping tools have been specially hardened.
- The tools are provided with high effectiveness and long using lifetime.

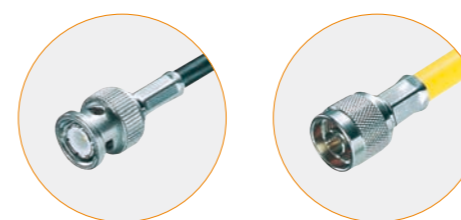

Model	Range of Application	Capacity	AWG	Length	Weight
AP Series Ratchet Crimping Plier					
AP-30J AP-30JC	For Insulated Terminals	0.5-6.0 mm ² 1.0-6.0 mm ²	20-10 AWG 18-10 AWG	250 mm	0.60 Kg
AP-05FJ	For Non-Insulated flay type tabs and receptacles	4.8/6.3 mm (0.5-1.5) mm ²	22-16 AWG	250 mm	0.60 Kg
AP-07FL	For Falg type insulated female terminals	1.25-2.5 mm ²	16-14 AWG	250 mm	0.60 Kg
AP-03C	For Insulated Terminals	0.5-6.0 mm ²	20-10 AWG	250 mm	0.60 Kg
AP-06WF2C	For Insulated terminals and cable end-sleeves	0.5-2.5 mm ²	20-14 AWG	250 mm	0.60 Kg



AP SERIES RATCHET CRIMPING PLIER

Model	Range of Application	Capacity	AWG	Length	Weight
AP Series Ratchet Crimping Plier					
AP-10	For Non-Insulated Terminals	1.5-6.0 mm ²	16-10 AWG	250 mm	0.60 Kg
AP-101	For Non-Insulated Terminals	1.5-10 mm ²	16-8 AWG	250 mm	0.60 Kg
AP-1016	For Non-Insulated Terminals	0.5-16 mm ²	20-8 AWG	250 mm	0.60 Kg
AP-03B	For Non-Insulated tabs and receptacles	1.5-6.0 mm ²	16-10 AWG	250 mm	0.60 Kg
AP-04WFL	For Insulated and Non-Insulated cable end-sleeves	0.5-4.0 mm ²	20-12 AWG	250 mm	0.60 Kg
AP-26TW	For Insulated and Non-Insulated cable end-sleeves	2 x 0.5-6.0 mm ²	2 x 20-10 AWG	250 mm	0.60 Kg
AP-02H	BNC/TNC, and Mini-UHF	RG59, RG62, BELDEN 8281, 50 and 75 ohm	0.315"(8.0mm)/0.252"(6.4mm)/0.068"(1.7mm) HEX & 0.042"(1.0mm) SQ		75 ohm 2-piece and 3-piece BNC/TNC(Kings, ADC, Amphenol, etc.)
AP-02H1	CATV "F" Type	RG59, RG6 VIDEO CABLE	0.346"(8.8mm)/0.319"(8.1mm)/0.256"(6.5mm) HEX		Crimps Ferrules or Sleeves Only
AP-05H	HDTV BNC/TNC Tue 75-ohm	Belden 1855A, 1865A, 1505A, 1505F, 1694A, 1694F, 179DT	0.178"(4.5mm)/0.255"(6.5mm)/0.278"(7.0mm) /0.068"(1.7mm)/0.041"(1.0mm) HEX		Kings, ADC, B & L, Trompeter, Amphenol, Switchcraft
AP-457	BNC/TNC	RG6, RG58	0.320"(8.13mm)/0.210"(5.33mm)/0.185"(4.7mm) HEX		2-piece BNC/TNC AIM. Cambridge, Kings, Amphenol

CABLE CONNECTOR

Model	Terminal Style	wide x thick mm ²	plug Ømm	cable mm ²	AWG	colour	Num				
020801	Female Sockets	6.3x0.8	-	0.5-1.0	20-17	red	75				
020802		6.3x0.8	-	1.5-2.5	15-13	blue	50				
020803		6.3x0.8	-	4.0-6.0	11-10	yellow	25				
020804		6.3x0.8	-	1.5-2.5	15-13	blue	50				
020805	Male Connectors	6.3x0.8	-	0.5-1.0	20-17	red	75				
020806		6.3x0.8	-	1.5-2.5	15-13	blue	75				
020807	Bullet shaped female insulating joint	-	4.0	0.5-1.0	20-17	red	25				
020808		-	5.0	1.5-2.5	15-13	blue	25				
020809	Bullet shaped male pre-insulating joint	-	4.0	0.5-1.0	20-17	red	75				
020810		-	5.0	1.5-2.5	15-13	blue	50				
020811	Shoule shaped male and female pre-insulation joint	6.3x0.8	-	0.5-1.0	20-17	red	25				
020812		6.3x0.8	-	1.5-2.5	15-13	blue	25				
020813	Circular pre-insulating terminal			3	0.5-1.0	20-17	red	100			
020814				4	0.5-1.0	20-17	red	100			
020815				5	0.5-1.0	20-17	red	100			
020816				4	1.5-2.5	15-13	blue	100			
020817				5	1.5-2.5	15-13	blue	50			
020818				6	1.5-2.5	15-13	blue	50			
020819				8	1.5-2.5	15-13	blue	50			
020820				5	4.0-6.0	11-10	yellow	25			
020821				6	4.0-6.0	11-10	yellow	25			
020822				8	4.0-6.0	11-10	yellow	25			
020823	Screws Ømm			10	4.0-6.0	11-10	yellow	25			
020824				3	0.5-1.0	20-17	red	100			
020825				4	0.5-1.0	20-17	red	100			
020826				5	0.5-1.0	20-17	red	75			
020827				4	1.5-2.5	15-13	blue	75			
020828				5	1.5-2.5	15-13	blue	50			
020829				5	4.0-6.0	11-10	yellow	25			
020830				6	4.0-6.0	11-10	yellow	25			
020831				Furcate naked terminal			6	0.5	20	red	100
020832							7	2.5	13	blue	100
020833	9	4.0	11				yellow	25			
020834	Pin-shaped preinsulating terminal			-	0.5-1.0	20-17	red	50			
020835				-	1.5-2.5	15-13	blue	25			
020836				-	4.0-6.0	11-10	yellow	25			
020837	Lonk full insulating middle joint			6	0.5	20		200			
020838				6	0.75	18		200			
020839				6	1.0	17		200			
020840				7	1.5	15		200			
020841				7	2.5	13		200			
020842				9	4.0	11		150			
020843				10	6.0	10		150			
020844				12	10.0	7		50			
020845				12	16.0	5		50			
020846				18	25	3		50			
020847	Tube nuked terminal			8	0.5	20		200			
020848				8	0.75	18		200			
020849				8	1.0	17		200			
020850				8	1.5	15		200			
020851				8	2.5	13	white	200			
020852				10	4.0	11	grey	150			
020853				12	6.0	10	red	150			
020854				12	10.0	7	black	50			
020855				12	16.0	5	blue	50			
020856				16	25	3	grey	50			
020857	Tube pre-insulating terminal				2.8-1.5	15	yellow	150			
020858					4.8-1.5	15	red	150			
020859					6.3-1.5	15	blue	100			
020860					6.3-2.5	15	yellow	100			





MULTI-FUNCTIONAL CRIMPING PLIER

FS-050



- For cutting, stripping wires and crimping insulated and non-insulated terminals, tabs and receptacles
- Designed with screw holes for cutting copper and brass wires (Thread: M2.6, 3.0, 4.0, 5.0mm)

Specification	
Length	220mm
Weight	0.23kg

HS-313



- Five in one multifunctional crimping pliers
- For stripping, cutting wires and crimping non-insulated terminals
- Precise stripping aperture diameter will not cut wire cores

Specification	
Length	235mm
Weight	0.22kg

IWS-028

Accessory:

- One FS-051
- One Test pen
- One Screw driver
- Insulated terminals



Feature:

- Newly developed precision blade cutter made this micro blade hole possible.
- Unlike conventional wire stripper, high carbon alloy steel guarantees longer life with such accurate stripping.
- Non-play fulcrum(joint) keeps the accuracy of stripping diameter.

Specification	
Length	230mm
Weight	0.6Kg


FS-051



- For cutting, stripping wires and crimping insulated and non-insulated terminals, tabs and receptacles
- Designed with screw holes for cutting copper and brass wires (Thread: M2.6, 3.0, 4.0, 5.0mm)

Specification	
Length	220mm
Weight	0.23kg

FS-047

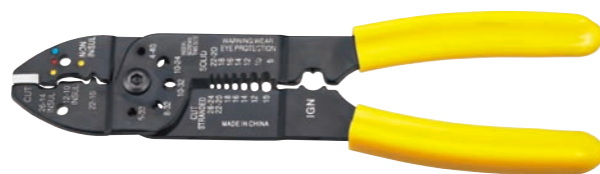

- For cutting, stripping wires and crimping insulated and non-insulated terminals, tabs and receptacles
- Designed with screw holes for cutting copper and brass wires (Thread: M2.6, 3.0, 4.0, 5.0mm)

Specification	
Length	210mm
Weight	0.23kg

IWS-029

Accessory:

- One D1 Wire Stripper
- One Test pen
- Insulated terminals



Feature:

- Stripping of wire range: 0.2-6mm² /24-10AWG, SK5/Cr12MoV steel blades, HRC52-60, line of cutting handcraft, high precision.
- For desired stripping length, accurate and straight wire cutting, for non-insulated and insulated terminals, PP&TPR handle.

Specification	
Length	210mm
Weight	0.7Kg

MINI-TYPE SELF-ADJUSTABLE CRIMPING PLIER

HSC8 6-4



It is applicable for tubular bare terminals and pre-insulated terminal on non-welding connection complied with standard electrical connection. When crimping, the terminal should be put into crimping pliers laterally. The demanded pressing force must be reached before the brake unit automatically release the jaw of the pliers. Thus high quality crimping standard could be ensured during repeatedly crimping. Due to perfect gripping position fixed and logical and light structure and the handle shape design meeting human being engineering principle, it reduces fatigue degree.

Specification	
Range of Application	Cable end-sleeves
Capacity	0.25-6.0mm ²
AWG	23-10
Length	175mm
Weight	0.36Kg


HSC8 6-6

Amazon's Choice



The design is unique due to light weight and saving energy. When crimping tightly, the gripping force would evenly transfer to all the section(4 or 6 spots)of crimping terminal..Because of reasonable design complied with human being engineering principle, the weight of the pliers is only 360g and the length of the pliers body is only 175mm.

Specification	
Range of Application	Cable end-sleeves
Capacity	0.25-6.0mm ²
AWG	23-10
Length	175mm
Weight	0.36Kg

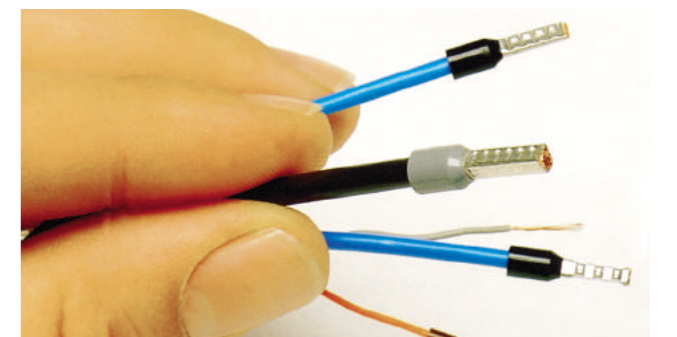

HSC8 16-4



It is applicable for tubular bare terminals and pre-insulated terminal on non-welding connection complied with standard electrical connection. When crimping, the terminal should be put into crimping pliers laterally. The demanded pressing force must be reached before the brake unit automatically release the jaw of the pliers. Thus high quality crimping standard could be ensured during repeatedly crimping.

Specification	
Range of Application	Cable end-sleeves
Capacity	6-16mm ²
AWG	10-5
Length	210mm
Weight	0.52Kg

CRIMPING TOOL KIT

C8K-D364A

- Accessories:
- HSC8 6-4 Crimper 1PC
- Crimping Range 0.25-6mm²
- FS-D3 Stripper 1PC
- Stripping Range 0.25-2.5mm²



Specification	
Length	200x95x50mm
Weight	0.65Kg

FSK-30JN

- Accessories:
- HS-30J Crimper 1PC
- Crimping Range 0.5-6mm²
- PH Screwdriver 1PC 6x10mm
- Jaws 4PC:
- Crimping Range 0.5-35mm²



Specification	
Length	272x121x63mm
Weight	1.1Kg

FSBK-054YJ

- Accessories:
- FSB-0525YJ Crimper (Crimping Range 0.5-4mm²)
- YF044 Stripper (0.25-6mm²)
- T20 Spanner (4x10mm)
- Jaws 4PC:
- B0525YJ, B056GT, B616GT, B056TD (Crimping 0.5-6mm²)



Specification	
Length	272x121x63mm
Weight	0.7Kg

SNK-D30725

- Accessories:
- SN-0725 Crimper 1PC
- Crimping Range 0.25-2.5mm²
- FS-D3 Stripper 1PC
- Stripping Range 0.25-2.5mm²
- H02 Spanner 2.5x100mm
- Crimping Jaws 2PC: N06WF, N0325
- Crimping Range 0.5-6mm²



Specification	
Length	200x95x50mm
Weight	0.6Kg

LY05H-5A2

- Accessories:
- Cable Cutter: WX-206 1PC, HT-312B
- Crimper: HS-05H & HT-312B
- 4DIE SET (A-02H, A-02H1, A457)
- WX-206 Cable Cutter



Specification	
Length	347x23x72mm
Weight	1.807Kg

FSAK-56YJ

- Accessories:
- FSA-0525YJ Crimper (Crimping Range 0.5-4mm²)
- YF044 Stripper (0.25-6mm²)
- T20 Spanner (4x10mm)
- Jaws 4PC:
- A10035GF, A625GF, A2056GF, A0510TD (Crimping 0.5-6mm²)



Specification	
Length	272x121x63mm
Weight	1.3Kg

GERMANY STYLE SMALL CRIMPING PLIER

PZ 0.25-2.5

- Application: for cable end sleeves
- Design: crimping in the marked trapezoidal profile for particularly tight connections between the sleeves and the conductor
- Material: special tool steel, oil-hardened.



Specification	
Capacity	0.25-2.5mm ²
Length	140mm
Weight	0.112Kg

PZ 0.5-16



Specification	
Capacity	0.5-16mm ²
Length	220mm
Weight	0.25Kg

HS-16

- For non-insulated cable links(Point type)
- With ratchet device, convenient operation and fine rust prevention
- Life time more than 30,000 times



Specification	
Capacity	1.25-16mm ² (17-5AWG)
Length	270mm
Weight	0.55Kg

PZ 1.5-6



Specification	
Capacity	1.5-6.0mm ²
Length	140mm
Weight	0.112Kg

PZ 10-35

- Application: for cable end sleeves
- Design: crimping in the marked trapezoidal profile for particularly tight connections between the sleeves and the conductor
- Material: special tool steel, oil-hardened.



Specification	
Capacity	10-35mm ²
Length	220mm
Weight	0.25Kg

HX-16

- For non-insulated terminals(Hexagonal type)
- With ratchet device, convenient operation and fine rust prevention
- Life time more than 30,000 times



Specification	
Capacity	6-16mm ² (10-6AWG)
Length	270mm
Weight	0.55Kg



CABLE LUG CRIMPING TOOL

HX SERIES

The crimping tools is used for non-welding and standard electrical connection. The mould of the crimping dies is made of SCM-40 hardest tool steel. It is with the characteristics of long life, accurate bore diameter and good crimping effect.



Part Numbers	Range of Application	Capacity	Length	Weight
HX-50B	BS Standard type terminals	6.0-50 mm ²	390mm	1.3Kg
HX-120B	BS Standard type terminals	10-120 mm ²	620mm	4Kg
HX-150B	BS Standard type terminals	25-150 mm ²	620mm	4Kg

KH SERIES

Crimping pliers KH series applicable for non-welding crimping complied with standard electrical connection. The material of the dies is accurate SK-5 tool steel with long life. Adjust the jaw diameter according to the sizes of terminals.



Part Numbers	Range of Application	Capacity	Length	Weight
KH-95	Large Y.O. terminals	6-95 mm ²	530mm	2.2Kg
KH-150	Large Y.O. terminals	25-150 mm ²	630mm	3.3Kg
KH-230	Large Y.O. terminals	50-240 mm ²	630mm	3.3Kg

CT SERIES

Crimping pliers CT series applicable for non-welding crimping complied with standard electrical connection. The material of the dies is accurate SK-5 tool steel with long life. Adjust the jaw diameter according to the sizes of terminals.



Part Numbers	Range of Application	Capacity	Length	Weight
CT-38	Large Y.O. terminals	8-38 mm ²	570mm	2.2Kg
CT-80	Large Y.O. terminals	8-95 mm ²	635mm	3.2Kg
CT-150	Large Y.O. terminals	16-150 mm ²	765mm	5.2Kg

FS SERIES



Part Numbers	Range of Application	Capacity	Length	Weight
FS35K	Terminals	6-3/0	630mm	3.6Kg
FS22K	Large Y.O. terminals	8-250MCM	610mm	3.1Kg
FS-300JYX1	Large Y.O. terminals	8-500MCM	980mm	4.7Kg

- Jaws are interchangeable
- Flip open head
- 360° rotating head
- adjustable handle



SN-2546B MC4 SOLAR PV CRIMP TOOL



Ratchet crimping tool for PH2.0/XH2.54/Dupont 2.54/2.8/3.0/3.96/4.8/KF2510/JST terminals solar panel PV cable from 14-10AWG.
Die Set: Wire-electrode Cutting

Specification	
Capacity	2.5/4/6mm ²
AWG	14-10AWG
Length	190mm
Weight	0.4Kg

LY-2048 SPARK PLUG WIRE TERMINAL TOOL



- Corrosion resistant carbon steel frame with comfort grip handles.
- Tool itself includes Spark Plug Wire Crimping and Stripping Function.
- Ratcheting mechanism releases after full compression and ensures perfect crimp every time.

Specification	
Crimping Specification	Max.8.5mm Spark Plug Terminals
Crimping Tool Material	Carbon Steel with Black oxide
Length	230mm
Weight	0.5Kg


NEW RELEASE

AP-11 ANDERSON POWERPOLE CONNECTOR TOOL



Specification	
Crimp Specification	15AMP/30AMP/45AMP
Material	Carbon steel
Length	245mm
Weight	0.6Kg

AP-2048 iCrimp® SPARK PLUG WIRE TERMINAL TOOL

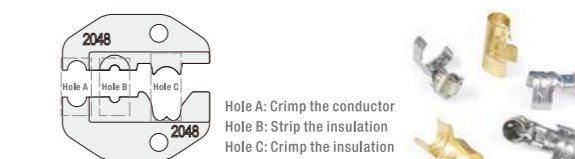

- Well polished jaws ensure no burr to damage the connector.
- Sharp blade removes the insulation from electric wires quickly and cleanly and leaving the actual conductor intact.
- More than 35% strength saving.
- Wider opening jaw makes it easier to position the terminals.
- Smooth ratcheting mechanism releases after full compression.

Specification	
Crimping Specification	Max.8.5mm Spark Plug Terminals
Crimping Tool Material	Carbon Steel with Black oxide
Length	245mm
Weight	0.6Kg

NEW RELEASES

IWS-1424A OPEN BARREL TERMINAL TOOL



- For 24-14AWG open barrel terminals
- Molex, Delphi, Deutsch, AMP/Tyco, Harley, PC/Computer, Automotive, Weather Pack, Metri-Pack connectors
- Double-hinge mechanism keeps the jaws parallel for a straight crimping engagement

Specification	
Capacity	24-14AWG
Jaw thickness	4mm
Length	195mm
Weight	0.30Kg

IWS-2820M OPEN BARREL CRIMPING TOOL



- Polished crimping dies ensure perfect crimps every time and easy to take out.
- Ergonomically designed handle(TPR+PP material) reduce working fatigue.
- Springs was tested over 1000 times about the strength.
- Small lock to settle plier after crimps.

Specification	
Capacity	0.08-0.5mm ²
AWG	28-20AWG
Length	180mm
Weight	0.4Kg

IWS-3220 RATCHET OPEN BARREL CRIMP TOOL

- Ensures stability and power equality for terminals and improves 30% of the crimping-tightness.
- Easy to insert the terminals correctly.
- Double-layer Wire EDM Cutting Jaws can make sure the surface of the jaws are smooth to avoid the terminals be stucked and offer excellent crimps.



Die			Applicable wire size		
Width(mm)	Height(mm)	Thickness	AWG	Ø mm	mm ²
1.0	0.50	1.7t	#32~#28	0.20~0.32	0.03~0.08
1.3	0.55		#28~#24	0.32~0.51	0.08~0.21
1.6	0.8	2.0t	#24~#22	0.51~0.64	0.21~0.33
1.9	0.9		#24~#20	0.51~0.81	0.21~0.52

Specification	
Capacity	24-14AWG
Jaw thickness	4mm
Length	195mm
Weight	0.30Kg

IWS-2412M OPEN BARREL CRIMPING TOOL



- Polished crimping dies ensure perfect crimps every time and easy to take out.
- Ergonomically designed handle(TPR+PP material) reduce working fatigue.
- Springs was tested over 1000 times about the strength.
- Small lock to settle plier after crimps.

Specification	
Capacity	0.21-3.31mm ²
AWG	24-12AWG
Length	180mm
Weight	0.4Kg

NEW RELEASES

IWS-1424B WEATHER PACK TERMINAL TOOL



- Crimp tool works for AWG 24-14 Gauge Delphi Weather-pack or Metri-Pack terminals or connectors.
- WeatherPack male terminals, female terminals and cable seals are secured into connector bodies with a hinge lock assembly.
- Auto-release mechanism ensure a full crimp without any loosen.

Specification	
Capacity	24-14AWG
Jaw thickness	4mm
Length	195mm
Weight	0.30Kg

IWS-2210H HEAT SHRINK CONNECTOR TOOL



Specification	
Crimp Specification	AWG22-16/AWG16-14/AWG12-10
Material	Carbon steel
Length	245mm
Weight	0.6Kg

IWS-1424BN RATCHET WEATHER PACK TOOL



- Weather-Pack Series, 24-14 gauge.
- Metri-Pack 280 Series, sealed, 24-14 gauge.(Must remove terminal locator)
- Polished crimping dies ensure perfect crimps every time and no stuck issue.

Specification	
Capacity	0.14-2.0mm ²
AWG	24-14AWG
Length	215mm
Weight	0.65Kg

A-0540HX DEUTCH PIN CRIMP TOOL



Series	Wire gauge (mm ²)	Wire gauge (AWG)	Stripping length(mm)
Han D*	0.14-1.5	AWG 26-16	8.0
Han E*	0.5-2.5	AWG 20-14	7.5
Han C*	1.5-4.0	AWG 16-12	9.5
Han-Yellock*	0.5-2.5	AWG 20-14	6.5

Specification	
Capacity	0.14-4.0mm ²
AWG	26-12AWG
Length	215mm
Weight	0.73Kg



NEW RELEASES

IWS-5100A / IWS-8200A BATTERY LUG TOOL



Specification		
Model.	IWS-5100A	IWS-8200A
Material	High-grade special tool steel	
Capacity	5A;10A-20A;30A-40A; 50A-60A;80A-100A	80A-100A;100A-150A; 150A-200A
AWG	16-4 wire	5-3 wire
Application	Battery lugs and open barrel connectors	

AM-5100A/AM-8200A BENCH-TOP BATTERY LUG TOOL



Specification		
Model.	AM-5100A	AM-8200A
Material	High-grade special tool steel	
Capacity	5A;10A-20A;30A-40A; 50A-60A;80A-100A	80A-100A;100A-150A; 150A-200A
AWG	16-4 wire	5-3 wire
Application	Battery lugs and open barrel connectors	

IWS-25500A HEAVY DUTY BATTERY LUG TOOL



- Processed with Wire EDM Cutting.
- Works with 250A-500A battery lug or open barrel connectors.
- Makes the connectors crimping much easier and saves labor.
- The best handle grasping position ensures a perfect crimping result.

Specification	
Capacity	250A-500A
Jaw thickness	10.2mm
Length	610mm
Weight	2.42Kg

IWS-510 / IWS-1030 / IWS-20100 BATTERY LUG TOOL



- Processed with Wire EDM Cutting.
- Works with 5A-100A battery lug or open barrel connectors.
- Makes the connectors crimping much easier and saves labor.
- The best handle grasping position, sleek design and excellent plastic handle ensures a perfect crimping result.

Specification	IWS-510	IWS-1030	IWS-20100
Capacity	5A-10A	10A-30A	20A-100A
Jaw thickness	12mm	12mm	12mm
Length	245mm	245mm	258mm
Weight	0.30Kg	0.30Kg	0.30Kg

NEW RELEASES

IWS-620KIT DUPONT CONNECTOR & HOUSINGS



1x1 pin 50PCS	1x2 pin 40PCS	1x3 pin 20PCS	1x4 pin 20PCS	1x5 pin 20PCS
1x6 pin 20PCS	2x2 pin 10PCS	2x3 pin 10PCS	2x4 pin 10PCS	2x5 pin 10PCS
2.54mm Male Pin 200PCS		2x6 pin 10PCS	2.54mm Female Pin 200PCS	

IWS-30J-KIT INSULATED TERMINALS



20PCS 0,5-1,5mm ² AWG 22-16	15PCS 0,5-1,5mm ² AWG 22-16	20PCS 1,5-2,5mm ² AWG 16-14	15PCS 1,5-2,5mm ² AWG 16-14	15PCS 4,0-6,0mm ² AWG 12-10	10PCS 4,0-6,0mm ² AWG 12-10
20PCS (M6) 1/4 0,5-1,5mm ² AWG 22-16	15PCS 0,5-1,5mm ² AWG 22-16	20PCS (M4) 8/8 1,5-2,5mm ² AWG 16-14	15PCS 1,5-2,5mm ² AWG 16-14	15PCS 4,0-6,0mm ² AWG 12-10	10PCS (M6) 1/4 4,0-6,0mm ² AWG 12-10
20PCS (M6) 1/4 0,5-1,5mm ² AWG 22-16	15PCS 0,5-1,5mm ² AWG 22-16	20PCS (M4) 8/8 1,5-2,5mm ² AWG 16-14	15PCS 1,5-2,5mm ² AWG 16-14	15PCS (M6) 1/4 4,0-6,0mm ² AWG 12-10	10PCS 4,0-6,0mm ² AWG 12-10

IWS-2210H-KIT HEAT SHRINK TERMINALS



16-14AWG Rings #10 5PCS	Rings 1/4" 5PCS	16-14AWG Rings 5/16" 5PCS	16-14AWG Male Spades 5PCS	Forks #10 5PCS	16-14AWG Butt Connectors 5PCS	Female Spades 5PCS	Rings 3/8" 5PCS	
12-10AWG Forks #10 5PCS	Male Spades 5PCS	22-16AWG Rings 1/4" 5PCS	Rings 5/16" 5PCS	22-16AWG Male Spades 5PCS	Forks #10 5PCS	22-16AWG Butt Connectors 5PCS	Female Spades 5PCS	Rings 3/8" 5PCS
12-10AWG Rings #10 5PCS	Rings 1/4" 5PCS	Rings 5/16" 5PCS	12-10AWG Female Spades 5PCS	12-10AWG Butt Connectors 5PCS	12-10AWG Rings 3/8" 5PCS			


DEUTSCH TYPE CONNECTORS & SOLID CONTACTS



Specification	
Available	DT, DTP, DTM series
Applications	automotive, industrial and motorsport

PNEUMATIC CRIMPING TOOL

AM-10

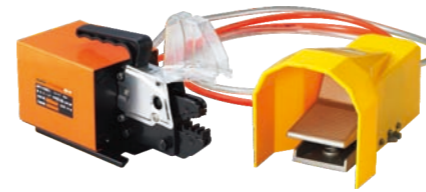


- (1) Put the terminal in relevant tool mouth firstly.
- (2) Then put the stripped insulated conductor into the terminal, push the foot air valve, loose it after crimping well. the foot air valve, loose it after crimping well.
- (3) Cut off gas supply. Dismount the fix bolts on the clamp with the L spanner.
- (4) Replace a desired clamp and screw down the bolt again.
- (5) Crimping die set for selection, see page A25.

The machine is driven by dual-action normal cylinder, which has advantages of high efficiency and quality in crimping force and speed. The machine is fit for crimping many kinds of terminals. The die sets are interchangeable with our manual crimping tools. So we can provide you all kinds of die sets for crimping.

Accessories: one die set one foot air valve two air pipes.

Specification	
Description	AM-10
Range of Application	Non-insulated terminal 16mm ² ≤ Insulated terminal 6mm ² ≤ Cylinder terminal 35mm ²
Output force	13.5 KN
Applicable air pressure	0.4~1Mpa
External dimension	260mm × 120mm × 140mm
Weight	5.0Kg

AM6-6



- The traditional fixed mould is replaced by the hexagonal crimping mould, which may perform flexible crimp connection to tubular insulated terminals.
- Since the hexagon can be adjusted steplessly, the crimping specification can be set freely within 0.08-6mm². (As Step 2)
- After crimping, the terminals look beautiful in hexagon without any flash edge.




The machine is driven by dual-action normal cylinder, which has advantages of high efficiency and quality in crimping force and speed. The machine is fit for crimping insulated and non-insulated cable end-sleeves.

Accessories: one foot air valve, two air pipes.

Specification	
Description	AM-6-6
Range of Application	Cylinder terminal 0.08-6mm ²
Output force	13.5 KN
Applicable air pressure	0.4~1Mpa
External dimension	260mm × 120mm × 140mm
Weight	5.0Kg

AM6-4



- The traditional fixed mould is replaced by the square crimping mould, which may perform flexible crimp connection to tubular insulated terminals.
- Since the square can be adjusted steplessly, the crimping specification can be set freely within 0.08-6mm².
- After crimping, the terminals look beautiful in hexagon without any flash edge.



The machine is driven by dual-action normal cylinder, which has advantages of high efficiency and quality in crimping force and speed. The machine is fit for crimping insulated and non-insulated cable end-sleeves.

Accessories: one foot air valve, two air pipes.

Specification	
Description	AM-6-4
Range of Application	Cylinder terminal 0.08-6mm ²
Output force	13.5 KN
Applicable air pressure	0.4~1Mpa
External dimension	260mm × 120mm × 140mm
Weight	5.0Kg





DIE SETS FOR SELECTION

<p>A30J</p> <p>0.5-6mm²</p>	<p>A03C</p> <p>0.5-6mm²</p>	<p>A-40J</p> <p>0.25-6mm²</p>	<p>A07FL</p> <p>1.25-2.5mm²</p>	<p>A06WF2C</p> <p>0.5-2.5mm²</p>
<p>A04WFL</p> <p>0.5-4mm²</p>	<p>A26TW</p> <p>2x0.5-6mm²</p>	<p>A16WF</p> <p>4-16mm²</p>	<p>A0616WFL</p> <p>6,10,16mm²</p>	<p>A625GFL</p> <p>6-25mm²</p>
<p>A35WF</p> <p>10-35mm²</p>	<p>A03B</p> <p>1.5-6mm²</p>	<p>A05FL / A-FL</p> <p>4.8-6.3mm² / 4.8mm²</p>	<p>A10</p> <p>1.5-6mm²</p>	<p>A101</p> <p>1.5-10mm²</p>
<p>VA-1510ND</p> <p>1.5-10mm²</p>	<p>A1016</p> <p>0.5-16mm²</p>	<p>A5516</p> <p>5.5-16mm²</p>	<p>A1HK</p> <p>2mm/2.2mm/2.4mm²</p>	<p>A2HK</p> <p>0.5-4mm²</p>
<p>A3HK</p> <p>4-10mm²</p>	<p>A1050</p> <p>10A-50A</p>	<p>A02H</p> <p>6.5mm/5.4mm 1.7mm</p>	<p>A02H2</p> <p>8.0mm/6.4mm 1.7mm/1.0mm</p>	<p>A05H</p> <p>4.5mm/6.5mm/7.0mm 1.7mm/1.0mm</p>
<p>A02H1</p> <p>8.8mm/8.1mm 6.5mm</p>	<p>A457</p> <p>5.4mm/8.0mm 11.0mm²</p>			



PNEUMATIC CRIMPING TOOL

AM-70 Heavy Duty Pneumatic Crimping Tool



Specification
AM-70 die sets :6,16,25,35,50,70mm ²
Application : Crimping Cable Terminals and Lugs
Crimping Type : Hexagonal, Crimping Force : 2T
Accessories : Series Crimping Dies , PU Tube , Foot Control Switch;
Weight : 14.0Kg , Air Pressure : 0.7-0.95 MPA

AM-240 Heavy Duty Pneumatic Crimping Tool



Specification
AM-240 die sets :16,25,35,50,70,95,120,150,185,240mm ²
Application : Crimping Cable Terminals and Lugs
Crimping Type : Hexagonal, Crimping Force : 3T
Accessories : Series Crimping Dies , PU Tube , Foot Control Switch;
Weight 22.0Kg

ELECTRICAL CRIMPING TOOL

EM-6B2



Type EM-6B2 is an ideal crimper for connection in cabinet. It is applicable for pre-insulated terminal crimping from 0.25mm² to 10mm² and Cu/Al cutting in 7mm. It is supplied with seven kinds of accurate and replaceable die sets. The crimper has high working efficiency and wide application.

The crimper is driven by fixed speed motor so that it owns advantages of high efficiency and high quality not only in crimping force but crimping speed. It is good for terminal crimping in large or medium quantity. If there are a lot of different kinds of terminals to be crimped, this crimper is the best choice.

Crimping die set for selection, see page A25.

Specification		
Model	EM-6B1	EM-6B2
Output	12.7KN	12.7KN
Max. Crimping Force	non-insulated terminals ≤ 16mm ² insulated terminals ≤ 6mm ² cable end -sleeves ≤ 35mm ²	
Crimping Time	1.5 S (60Hz) 1.8 S (50Hz)	1.5 S (60Hz) 1.8 S (50Hz)
Volts	AC100-125V	AC200-230V
Power Consumption	90W	90W
Dimension	325x265x150mm(12.8 x 10.5 x 5.9inch)	
Weight	18.16Kg	18.16Kg

Note: The above types and sizes are the standard crimper. If need to be improved or ordered specially, contact with the supplier.